

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES


Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

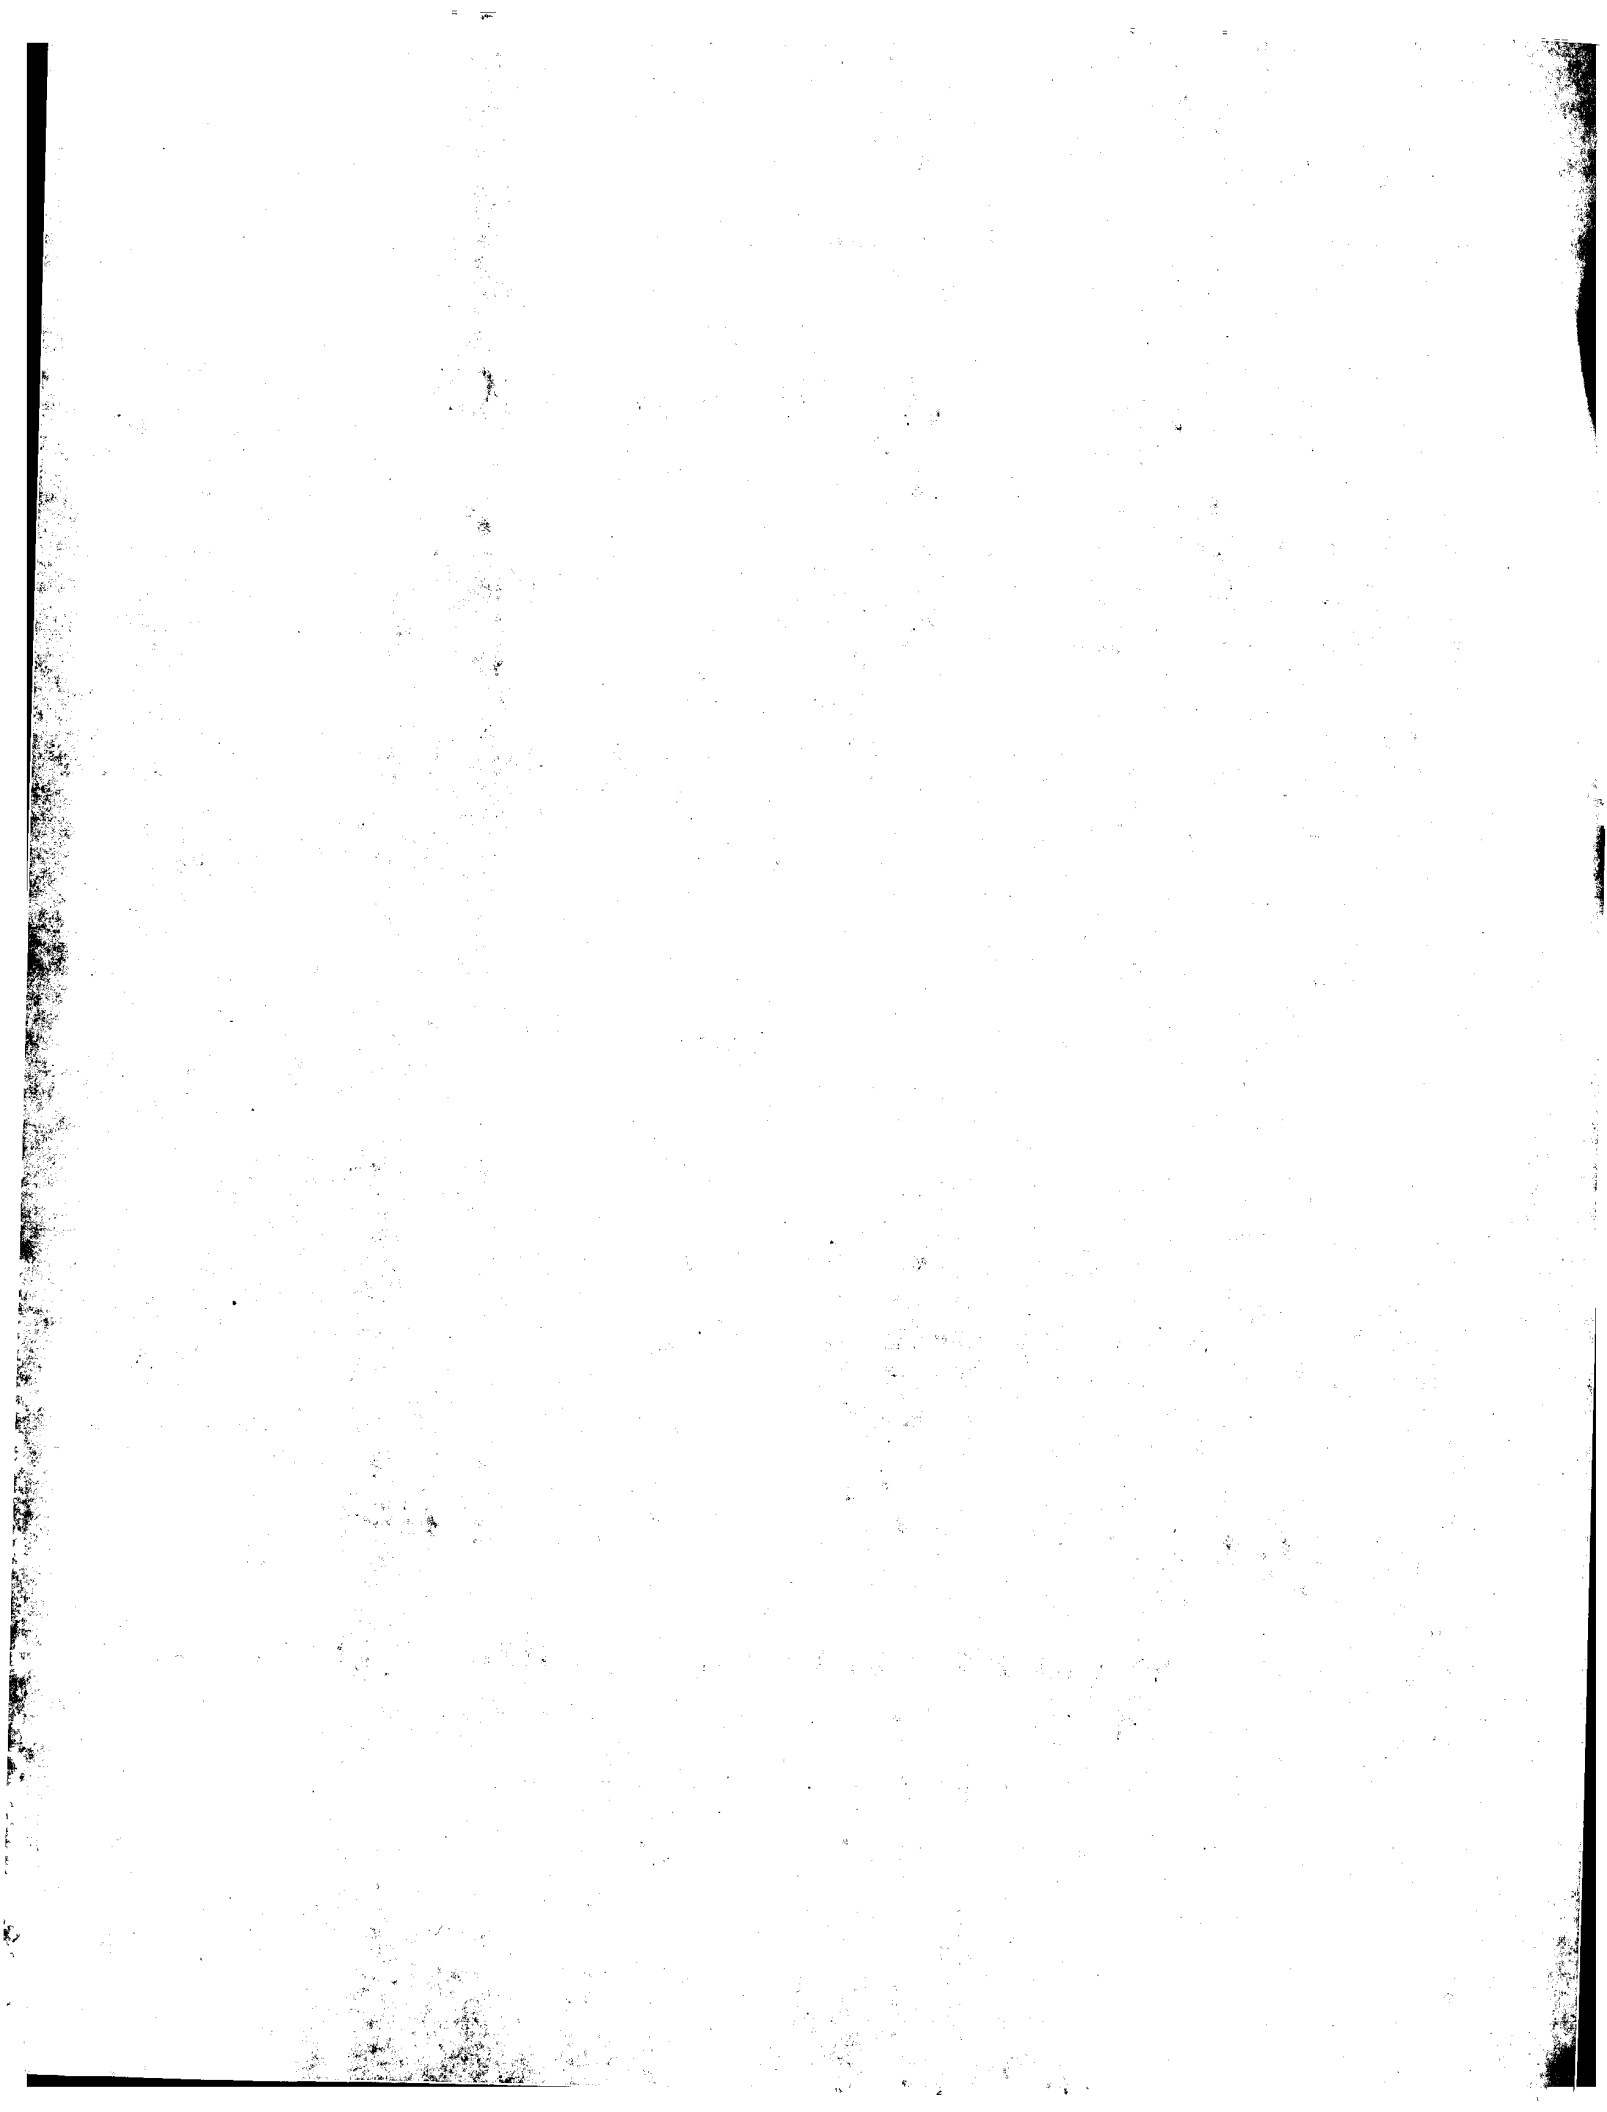



**Europäisches
Patentamt**

**European
Patent Office**

**Office européen
des brevets**

Bescheinigung

Certificate

Attestation

Die angehefteten Unterlagen stimmen mit der ursprünglich eingereichten Fassung der auf dem nächsten Blatt bezeichneten europäischen Patentanmeldung überein.

The attached documents are exact copies of the European patent application described on the following page, as originally filed.

Les documents fixés à cette attestation sont conformes à la version initialement déposée de la demande de brevet européen spécifiée à la page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

03002728.8

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk



Anmeldung Nr:
Application no.: 03002728.8
Demande no:

Anmeldetag:
Date of filing: 06.02.03
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

STMicroelectronics S.r.l.
Via C. Olivetti, 2
20041 Agrate Brianza (Milano)
ITALIE

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.
If no title is shown please refer to the description.
Si aucun titre n'est indiqué se referer à la description.)

Methods and apparatus for texture compression and computer program product
therefor

In Anspruch genommene Priorität(en) / Priority(ies) claimed /Priorité(s)
revendiquée(s)

Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/
Classification internationale des brevets:

G06T/

An Anmeldetag benannte Vertragstaaten/Contracting states designated at date of
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LU MC NL
PT SE SI SK TR LI

06. Feb. 2003

"Methods and apparatus for texture compression and
computer program product therefor"

* * *

5

Field of the invention

The present invention relates to texture compression techniques.

Compression and decompression intended to minimize
10 the memory size needed to store 2D textures is a promising field of application for these techniques in the 3D graphic domain. This possible field of use is becoming more and more significant as the dimensions and number of these textures tend to increase in real
15 applications. The level of detail tends to increase as required by some applications, such as 3D games, and, without the help of such techniques, memory size and bandwidth for access would tend to require increasing performance levels hardly sustainable in mobile, ultra
20 low power, handheld systems. More to the point, these techniques are becoming increasingly important in wireless phone architectures with 3D games processing capabilities.

For example, assuming a texture dimension of 512 x
25 512 pixels 16 bit/color each and a depth of 3, the amount of memory needed is 1.5 M bytes. Assuming 20-30 frames per second, the memory bandwidth is 30 to 45 Mbytes/s.

Additional background information on this topic
30 can be gathered from "Real-Time Rendering" by Tomas Akenine-Möller and Eric Haines, A.K. Peters Ltd, 2nd edition, ISBN 1568811829.

Description of the related art

A well-known solution in this scenario was
35 developed by the company S3; the related algorithm is

designated S3TC (where TC stands for Texture Compression).

This has become a widely used de-facto standard and is included in the Microsoft DirectX libraries with
5 ad hoc API support.

Compression is performed off-line at system initialization and next the textures are stored in the main memory. Decompression processes act to decompress textures accessing the memory run-time when needed by
10 the graphic engine. This means that only decompression is implemented in hardware form while compression is not.

Important parameters for the decompression engine are: steps needed to decompress textures and possible
15 parallel operation; low latency between data-access-from-memory and data-out-from the decompression engine.

In order to better understand operation of the S3TC algorithm one may refer to an image in RGB format, where each color component R (Red) or G (Green) or B
20 (Blue) is a sub-image composed by N pixels in the horizontal dimension and M pixels in vertical dimension. If each color component is coded with P bits, the number of bits per image is $N*M*3*P$.

For example, assuming $N=M=256$ and $P=8$, then the
25 resulting size is 1,572,864 bits. If each sub-image R or G or B is decomposed in non-overlapping blocks of Q pixels in the horizontal dimension and S pixel in the vertical dimension, the number of blocks per sub-image is $(N*M)/(Q*S)$ while per image is $[3(NM/(Q*S))]$ and the
30 number of bits per block is $[3*(Q*S)]*P$. If, for example $Q=S=4$ and $P=8$, then the resulting size of each block is 384 bits. If the number of bits per channel is $R=5$, $G=6$, $B=5$ then the resulting size of each block per image is $(4*4)*(5+6+5)=256$ bits. The S3TC algorithm is
35 able to compress such an amount of data by 6 times when

R=8, G=8, B=8 and 4 times when R=5, G=6, B=5. 64 bits compose the resulting compressed block always sent to decompression stage. This number is the results of the coding steps described below assuming $Q=S=4$.

5 To sum up, operation of the S3TC algorithm may be regarded as comprised of the following steps:

i) Decompose the R G B image in non-overlapped $(Q=4) * (S=4)$ blocks of R G B colors

10

ii) Consider the following block composed by 16 pixels each one composed by R, G and B color components:

15 $P_{ij} = R_{ij} \cup G_{ij} \cup B_{ij}$ (this denotes the pixel at the ij position the R G B image, and \cup is the union operator)

(R11 G11 B11) (R12 G12 B12) (R13 G13 B13) (R14 G14 B14)
 (R21 G21 B21) (R22 G22 B22) (R23 G23 B23) (R24 G24 B24)
 20 (R31 G31 B31) (R32 G32 B32) (R33 G33 B33) (R34 G34 B34)
 (R41 G41 B41) (R42 G42 B42) (R43 G43 B43) (R44 G44 B44)

iii) Decompose the block above in three sub-blocks called sub-block R, sub-block G and sub-block B as shown herein below, each block including only one color component:

25 R11 R12 R13 R14 sub-block R
 R21 R22 R23 R24
 R31 R32 R33 R34
 30 R41 R42 R43 R44

G11 G12 G13 G14 sub-block G
 G21 G22 G23 G24
 G31 G32 G33 G34
 35 G41 G42 G43 G44

B11 B12 B13 B14 sub-block B
 B21 B22 B23 B24
 B31 B32 B33 B34
 5 B41 B42 B43 B44

as shown in figure 1.

10 Specifically, figure 1 shows RGB blocks ordered in
 different planes, with a RGB block shown on the left
 and a corresponding de-composition shown on the right.

iv) Sort in ascending order each sub-block color

15 v) Detect the black color, which is a pixel made
 of $R=0$ and $G=0$ and $B=0$

vi) If the black color is not detected, then set a color palette made by

20

a. 1st color is the minimum value of sub-
 block R (\min_R), minimum value of sub-block G
 (\min_G), minimum value of sub-block B (\min_B).

25

b. 2nd color is the maximum value of sub-
 block R (\max_R), maximum value of sub-block G
 (\max_G), maximum value of sub-block B (\max_B)

30

c. 3rd (Int1) is composed by $(2 \cdot \min R + \max R) / 3$ (Int1R), $(2 \cdot \min G + \max G) / 3$ (Int1G), $(2 \cdot \min B + \max B) / 3$ (Int1B)

35

d. 4th (Int2) is composed by $(\min R + 2 \cdot \max R) / 3$ (Int2R), $(\min G + 2 \cdot \max G) / 3$ (Int2G), $(\min B + 2 \cdot \max B) / 3$ (Int2B)

5

10

15

20

25

30

```

Look-up table =    [ MinR, Int1R, MaxR 0]
                   [ MinG, Int1G, MaxG 0]
                   [ MinB, Int1B, MaxB 0]

```

ix) Associate the following 2 bits code (in boldface, under the palette) to each column of the above palette

5 Look-up table = [MinR, Int1R, Int2R, MaxR]
 [MinG, Int1G, Int2G, MaxG]
 [MinB, Int1B, Int2B, MaxB]
 00 01 10 11

10 Look-up table = [MinR, Int1R, MaxR 0]
 [MinG, Int1G, MaxG 0]
 [MinB, Int1B, MaxB 0]
 00 01 10 11

15 x) For each $P_{ij} = R_{ij} \cup G_{ij} \cup B_{ij}$ (where i ranges from 1 to $Q=4$ and j ranges from 1 to $S=4$) compute the Euclidean distance Dist between it and each look-up color as defined above in vi.a,b,c,d or vii.a,b,c,d depending if black color has been detected or not.
 20 Essentially this is the Euclidean distance between two points in a three-dimensional coordinate space. Also, the difference is within a homologous color component (between R or G or B).

25 Dist1 = $\sqrt{(|R_{ij}-MinR|^2 + |G_{ij}-MinG|^2 + |B_{ij}-MinB|^2)}$
 Dist2 = $\sqrt{(|R_{ij}-Int1R|^2 + |G_{ij}-Int1G|^2 + |B_{ij}-Int1B|^2)}$
 Dist3 = $\sqrt{(|R_{ij}-Int2R|^2 + |G_{ij}-Int2G|^2 + |B_{ij}-Int2B|^2)}$
 Dist4 = $\sqrt{(|R_{ij}-MaxR|^2 + |G_{ij}-MaxG|^2 + |B_{ij}-MaxB|^2)}$

30 xi) For each $P_{ij} = R_{ij} \cup G_{ij} \cup B_{ij}$ find the minimum distance among Dist1, Dist2, Dist3 and Dist4. For example let it be Dist1.

xii) Send to a decoder process the code associated to the color enclosed in the look-up table that has the minimum distance. If it is Dist1 then the code is 00.

5 xiii) The decoder receives for each Q*S block as shown in figure 2

 a. a two-bit code for each P_{ij} that are addresses to the look-up table

10 b. MinR MinG MinB

 c. MaxR MaxG MaxB

 xiv) If Min is received before Max by the decoder
15 then black has been detected by the encoder otherwise not

 xv) As shown in figure 2, the decoder operates as described in steps vi or vii depending on black color
20 detection, computing

 a. IntlR IntlG IntlBand Int2R Int2G Int2B if black color is not detected by encoder

25 otherwise

 b. IntlR IntlG IntlB if black color is detected by encoder

30 xvi) As shown in figure 2, the decoder addresses a look-up table with 2 bits code associated to each P_{ij} and replaces it with the color stored in the look-up table color palette. Specifically ST, LUT, and CT indicate the source text, the look-up table, and the
35 compressed text, respectively.

Figure 3 shows how the data sent to the decoder are arranged in a bitstream and if the black color is not detected, while figure 4 shows the opposite case.

5 As stated before, the compression ratio is 6:1 or 4:1. This is because if colors are in R=8 G=8 B=8 format then 384 bits are coded with 64 ($384/64=6$) and if colors are in R=5 G=6 B=5 format then 256 bits are coded with 64 ($256/64=4$).

10 As shown in figure 3 and 4, the sum of all the bits amounts to 64.

Object and summary of the invention

However satisfactory the prior art solution considered in the foregoing may be, the need is felt
15 for alternative texture compression/decompression techniques of improved quality.

The aim of the present invention is thus to provide such an alternative, improved technique, leading to better performance in terms of quality
20 achieved and complexity needed for its implementation.

According to the present invention, such an object is achieved by means of a method having the features set forth in the claims that follow. The invention also encompasses the decoding process as well as
25 corresponding apparatus in the form of either a dedicated processor or a suitably programmed general-purpose computer (such as a DSP). In that respect the invention also relates to a computer program product directly loadable into the memory of a digital computer
30 such as a processor and including software code portions performing the method of the invention when the product is run on a computer.

Essentially, the preferred embodiment of the invention provides a significant improvement over prior

art solutions such as S3TC from different viewpoints, since it uses the following compression tools:

- color prediction,
- color-de-correlation,
- 5 - sorting of the prediction errors,
- generation of the look-up table,
- bitstream packing, and
- decoding process.

These tools are different from those used in S3TC or
10 not even provided in S3TC.

Brief descriptions of the drawings

The invention will now be described, by way of example only, with reference to the annexed figures of
15 drawing, wherein:

- figures 1 to 4, pertaining to the prior art, have already been described in the foregoing,
- figure 5 shows a R or G or B sub-block sorted from left to right in ascending order in a possible
20 embodiment of the invention,
- figure 6 is a block diagram of a pipeline arrangement to evaluate the performance of the compression and decompression techniques described herein,
- 25 - figures 7a to 7h are diagrams showing the directions used to scan and predict pixels in the arrangement shown herein, and
- figures 8 and 9 show additional details of possible embodiments of the arrangement described
30 herein.

Detailed description of preferred embodiments of the invention

A first embodiment of the invention will now be described by using the same approach previously adopted

for describing, in the case of $Q=S=4$, the S3TC arrangement.

This method will first be described by referring to an exemplary embodiment where $Q=S=3$.

5

i) Decompose the R G B image in non-overlapped $Q \times S$ blocks of R G B colors

ii) Consider the following 3×3 block composed by
10 nine pixels each one composed by R, G and B components:

$P_{ij} = R_{ij} \cup G_{ij} \cup B_{ij}$ (where P_{ij} again denotes the pixel placed in the ij position in the R G B image, and \cup is the union operator)

15

(R11 G11 B11) (R12 G12 B12) (R13 G13 B13)
(R21 G21 B21) (R22 G22 B22) (R23 G23 B23)
(R31 G31 B31) (R32 G32 B32) (R33 G33 B33)

20 iii) Decompose the above block in three sub-blocks called sub-block R, sub-block G and sub-block B, respectively, as shown below, wherein each block includes only a color component:

25 R11 R12 R13 sub-block R
R21 R22 R23
R31 R32 R33

30 G11 G12 G13 sub-block G
G21 G22 G23
G31 G32 G33

35 B11 B12 B13 sub-block B
B21 B22 B23
B31 B32 B33

- iv) Define a 1st predictor for each sub-block
 - a. R22 as prediction for all colors in the same sub-block R excluding R22
 - 5 b. G22 as prediction for all colors in the same sub-block G excluding G22
 - c. B22 as prediction for all colors in the same sub-block B excluding B22
- 10 v) Compute for each sub-block the following prediction differences:
 - a. Sub-block R
 - i. (R22-R11), (R22-R12), (R22-R13), (R22-
 - 15 R21), (R22-R23), (R22-R31), (R22-R32), (R22-R33)
 - b. Sub-block G
 - i. (G22-G11), (G22-G12), (G22-G13), (G22-
 - 20 G21), (G22-G23), (G22-G31), (G22-G32), (G22-G33)
 - c. Sub-block B
 - i. (B22-B11), (B22-B12), (B22-B13), (B22-
 - B21), (B22-B23), (B22-B31), (B22-B32), (B22-B33)
- 25 vi) Sort in ascending order the prediction differences in each sub-block as shown in figure 5: specifically, the figure shows R or G or B sub-block prediction differences sorted from left to right in ascending order; each number is the position in
 - 30 ascending order that addresses each prediction difference.
- vii) Set up a look-up prediction difference palette wherein

a. 1st value is the minimum for the prediction differences in sub-block R. The same applies for the prediction differences in sub-blocks G and B, thus yielding min_errorR, min_errorG, min_errorB:

b. 2nd value is the maximum for the prediction differences in sub-block R. The same applies for the prediction differences in sub-blocks G and B thus yielding max_errorR, max_errorG, max_errorB.

c. 3rd is Int1 composed by

$$\begin{aligned} \text{i. Int1R} &= (2 * \text{min_errorR} + \text{max_errorR}) / 3, \\ \text{Int1G} &= (2 * \text{min_errorG} + \text{max_errorG}) / 3, \\ \text{Int1B} &= (2 * \text{min_errorB} + \text{max_errorB}) / 3 \end{aligned}$$

d. 4th is Int2 composed by

$$\begin{aligned} \text{i. Int2R} &= (\text{min_errorR} + 2 * \text{max_errorR}) / 3 \\ \text{Int2G} &= (\text{min_errorG} + 2 * \text{max_errorG}) / 3, \\ \text{Int2B} &= (\text{min_errorB} + 2 * \text{max_errorB}) / 3 \end{aligned}$$

(In fact the relationships reported in the foregoing correspond to the presently preferred choice within the general relationships:

$$\begin{aligned} \text{Int1 (R, G, B)} \\ = & (a * \text{min_errorR} + b * \text{max_errorR}) / (a + b), \\ & (c * \text{min_errorG} + d * \text{max_errorG}) / (c + d), \\ & (e * \text{min_errorB} + f * \text{max_errorB}) / (e + f), \end{aligned}$$

$$\begin{aligned} \text{Int2 (R, G, B)} \\ = & g * \text{min_errorR} + h * \text{max_errorR}) / (g + h), \\ & (i * \text{min_errorG} + l * \text{max_errorG}) / (i + l), \\ & (m * \text{min_errorB} + n * \text{max_errorB}) / (m + n) \end{aligned}$$

where a, b, c, d, e, f, g, h, i, l, m, and n are weighing factors).

viii) Define a look-up prediction error palette
as

Look-up table=

5 [Min_errorR, Int1R, Int2R, Max_errorR]
 [Min_errorG, Int1G, Int2G, Max_errorG]
 [Min_errorB, Int1B, Int2B, Max_errorB]

ix) Associate the following 2 bit code with each
10 column of the above palette

Look-up table =

 [Min_errorR, Int1R, Int2R, Max_errorR]
 [Min_errorG, Int1G, Int2G, Max_errorG]
15 [Min_errorB, Int1B, Int2B, Max_errorB]
2 BIT CODE = 00 01 10 11

x) For each $P_{ij} = R_{ij} \cup G_{ij} \cup B_{ij}$ (where i ranges
from 1 to $Q=3$ and j ranges from 1 to $S=3$) compute the
20 prediction error using P_{22} as predictor.

a. The prediction error is defined as $E_{ij} =$
 $E_{Rij} \cup E_{Gij} \cup E_{Bij} = (R_{22} - R_{ij}) \cup (G_{22} - G_{ij}) \cup (B_{22} - B_{ij})$

25 xi) For each E_{ij} compute the Euclidean distance
between it and each look-up color as defined above in
step ix. This is again the Euclidean distance between
two points in a three-dimensional coordinate space and
the difference is between homologous prediction error
30 components.

Dist1 = $\sqrt{(|E_{Rij} - \text{Min_errorR}|^2 + |E_{Gij} - \text{Min_errorG}|^2 +$
 $|E_{Bij} - \text{Min_errorB}|^2)}$
Dist2 = $\sqrt{(|E_{Rij} - \text{Int1R}|^2 + |E_{Gij} - \text{Int1G}|^2 + |E_{Bij} - \text{Int1B}|^2)}$
35 Dist3 = $\sqrt{(|E_{Rij} - \text{Int2R}|^2 + |E_{Gij} - \text{Int2G}|^2 + |E_{Bij} - \text{Int2B}|^2)}$

$$\text{Dist4} = \sqrt{(|E_{Rij} - \text{Max_errorR}|^2 + |E_{Gij} - \text{Max_errorG}|^2 + |E_{Bij} - \text{Max_errorB}|^2)}$$

5 xii) For each $E_{ij} = E_{Rij} \cup E_{Gij} \cup E_{Bij}$ find the minimum distance among Dist1, Dist2, Dist3 and Dist4. For example this may be Dist1.

 xiii) Compose a bitstream as follows:

- 10 a. P22 color = 16 bits
- b. P22+Min_error = 16 bits (= P22R+min_errorR
U P22G+min_errorG U P22B+min_errorB)
- c. P22+Max_error = 16 bits (= P22R+max_errorR
U P22G+max_errorG U P22B+max_errorB)
- 15 d. For each $P_{11}, P_{12}, P_{13}, P_{21}, P_{23}, P_{31}, P_{32}, P_{33}$ a 2 bits code is associated following steps 11, 12, 13. For example if Dist1 is the minimum distance for P_{ij} then the code associated and transmitted to it is 00.

20 xiv) Each 3*3 block is encoded to 16+16+16+(8*2)=64 bits instead of 144 bits with a compression factor of 2.25 if the RGB source format is 565. The value 3.375 if the RGB source format is 888.

25 In the decoding process, the decoder will receive the incoming bitstream and proceed through the following steps:

- a. Get P22
- 30 b. Get P22+Min_error (= P22R+min_errorR
U P22G+min_errorG U P22B+min_errorB)
- c. Get P22+Max_error (= P22R+max_errorR
U P22G+max_errorG U P22B+max_errorB)
- 35 d. Then compute Min_error and Max_error inverting formula described in the above steps a,b for each color R,G,B as

- i. $\text{Min_error} = (\text{P22} + \text{Min_error}) - \text{P22}$
- ii. $\text{Max_error} = (\text{P22} + \text{Max_error}) - \text{P22}$
- e. Next compute look-up prediction error palette as per step vii) c,d and viii)
- 5 f. Use 2 bit code to address look-up table and adding the value (thus addressed) to P22 to recreate each P_{ij}

10 The arrangement disclosed in the foregoing has been implemented for the following standard images and using two formats: RGB 565 and RGB 888, where 5, 6 or 8 are the number of bits per color channel.

- 1. 256x256 (horizontal x vertical size dimension)
 - 15 • Abstrwav
 - Bricks
 - Bricks2
 - Chapt
 - Forest
 - 20 • Image0
 - Intel
 - Pixtest
 - Reference
 - Rov
 - 25 • Teleport
 - Topsmap
- 2. 512x512 (horizontal x vertical size dimension)
 - Donut
- 30 3. 640x480 (horizontal x vertical size dimension)
 - Balloon
 - DragonFly
 - Paper
 - 35 • Particles

- Sparkle

These pictures are a representative set on which typically texture compression is applied. All pictures are in true-color format or 888, while the 565 are obtained from 888 truncating the 323 lowest bits of the 888 pictures. Alternative truncating methods can be used to transform 888 pictures into 565 pictures such as "rounding to nearest integer", "Floyd-Steinberg dithering" etc. These alternatives do not entail changes to the arrangement disclosed herein.

To measure the performance of each algorithm, visual assessments and objective measures were performed, by taking two parameters as the reference measures, namely mean square error (MSE) and peak signal/noise ratio (PSNR) for each RGB channel.

Figure 6 shows how measurements are carried out in the simulation environment.

Input images IS in the 888 format (called Source888) are converted at 200 into the 565 format (called Source565), then compressed at 201 and further decompressed at 202 to the 565 format. These images are back converted at 203 into the 888 format to generate a first set of output images OS' (also called Decoded888).

The Source-565 images from block 200 are back converted into the 888 format at 204 to generate a second set of output images OS'' to be used as a reference (called Source565to888).

A first set of PSNR values (called PSNR 888) are computed between the Source 888 IS and the Decoded888 OS' images. A second set of PSNR (called PSNR 565) values are computed between the Source565to888 OS'' and the Decoded888 OS' images.

The 565 images are back reported to the 888 format by simple zero bit stuffing of the 323 least important positions.

How the Source888 IS images are converted to the 565 format and back to the 888 format corresponds to conventional techniques that do not need to be described in detail herein.

Mean squared (MSE) and peak (PSNR) error are defined as follows:

10

$MSE = (|P_{ij} - P_{aij}|^2) / (w * h)$ where:

P_{ij} = source color

P_{aij} = processed color, after coding and decoding

15

w, h = image width, height

$PSNR = 10 \log_{10} [(2^{bpp} - 1)^2 / MSE]$ where:

bpp = bit per color

20

Due to its predictive nature, the arrangement previously described is almost invariably able to achieve better performance, while yielding a lower compression ratio than S3TC.

The proposed arrangement can be easily extended to $Q=4 \times S=4$ blocks by simply adding one more column at the right side and one more row at the bottom side of the $Q=3 \times S=3$ "chunk".

The main difference with respect to the embodiment described in the foregoing is related to the possibility of adopting a plurality of different patterns for extending the 3×3 block to a 4×4 block as best shown in figure 7 of the drawing.

30

This extension will be described in the following.

i) Decompose the R G B image in non overlapped $Q \times S$ blocks of R G B colors

ii) Consider the following $Q=4 \times S=4$ block composed of 16 pixels each one composed by R, G and B components:

$P_{ij} = R_{ij} \cup G_{ij} \cup B_{ij}$ (where P_{ij} is again the pixel at the ij position in the R G B image, and \cup is the union operator)

(R11 G11 B11) (R12 G12 B12) (R13 G13 B13) (R14 G14 B14)
 (R21 G21 B21) (R22 G22 B22) (R23 G23 B23) (R24 G24 B24)
 (R31 G31 B31) (R32 G32 B32) (R33 G33 B33) (R34 G34 B34)
 (R41 G41 B41) (R42 G42 B42) (R43 G43 B43) (R44 G44 B44)

iii) Decompose the above block in three sub-blocks called sub-block R, sub-block G and sub-block B, respectively, as shown below, wherein each block includes only a color component

R11 R12 R13 R14 sub-block R
 R21 R22 R23 R24
 R31 R32 R33 R34
 R41 R42 R43 R44

G11 G12 G13 G14 sub-block G
 G21 G22 G23 G24
 G31 G32 G33 G34
 G41 G42 G43 G44

B11 B12 B13 B14 sub-block B
 B21 B22 B23 B24
 B31 B32 B33 B34

B41 B42 B43 B44

iv) Define a 1st predictor for each sub-block

5 g. R22 as prediction for 3x3 colors
surrounding R22 (i.e. R11, R12, R13, R21, R23,
R31, R32, R33)

 h. G22 as prediction for 3x3 colors
surrounding G22 (i.e. G11, G12, G13, G21, G23,
10 G31, G32, G33)

 i. B22 as prediction for 3x3 colors
surrounding B22 (i.e. B11, B12, B13, B21, B23,
B31, B32, B33)

15 See, in that respect, figure 7a, where this
prediction pattern is represented geometrically.

v) Define

20 j. a 2nd set of predictors (see figure 7b)
where:

 i. R23 as prediction for R14 R24 R34
 ii. R32 as prediction for R41 R42 R43
25 iii. R33 as prediction for R44

 iv. G23 as prediction for G14 G24 G34
 v. G32 as prediction for G41 G42 G43
 vi. G33 as prediction for G44
30

 vii. B23 as prediction for B14 B24 B34
 viii. B32 as prediction for B41 B42 B43
 ix. B33 as prediction for B44
35

k. or a 3rd set of predictors (see again the pattern shown in figure 7a) with

- i. R13 as prediction for R14
- ii. R23 as prediction for R24
- 5 iii. R33 as prediction for R34 R44 R43
- iv. R31 as prediction for R41
- v. R32 as prediction for R42
- vi. G13 as prediction for G 14
- vii. G23 as prediction for G24
- 10 viii. G33 as prediction for G34 G44 G43
- ix. G31 as prediction for G41
- x. G32 as prediction for G42
- xi. B13 as prediction for B14
- xii. B23 as prediction for B24
- 15 xiii. B33 as prediction for B34 B44 B43
- xiv. B31 as prediction for B41
- xv. B32 as prediction for B42

It will be appreciated that other prediction patterns are feasible, as shown in figures 7c to 7h.

vi) Compute for each sub-block the following prediction differences:

- 25 1. Sub-block R
 - i. (R22-R11), (R22-R12), (R22-R13), (R22-R21), (R22-R23), (R22-R31), (R22-R32), (R22-R33)
 - 30 ii. and the differences between predictors as defined in step v.j and v.k and related homologous colors
- m. Sub-block G
 - i. (G22-G11), (G22-G12), (G22-G13), (G22-G21), (G22-G23), (G22-G31), (G22-G32), (G22-G33)

ii. and the differences between predictors as defined in step v.j) and v.k) and related homologous colors

n. Sub-block B

5

i. (B22-B11), (B22-B12), (B22-B13), (B22-B21), (B22-B23), (B22-B31), (B22-B32), (B22-B33)

ii. and the differences between predictors as defined in step v.j) and v.k) and related homologous colors

10

o. From this point onwards, up to 8 full encodings of the block will run in parallel depending on the set of predictors used (since up to 8 prediction configurations are possible). At the end of the 8 encodings the arrangement disclosed herein will compute the MSE between block before and after each encoding (out of 8 possible). The one with the minimum MSE will be selected to generate the bitstream that will be sent to the decoder.

15

20

vii) Sort in ascending order the prediction differences for each sub-block as shown in figure 8. Each number is the position that addresses each prediction differences in ascending order. Specifically, figure 8 shows R or G or B sub-block prediction differences sorted from left to right in ascending order

25

viii) Two groups are defined by the sorted prediction differences. The first is composed by the three lowest elements and the second by the three highest as shown in figure 8.

30

ix) Set a look-up prediction differences palette composed as follows:

35

e. 1st value is the median of the 1st group as defined in step 8 for sub-block R prediction differences. The same applies for sub-block G and B, thus yielding min_median_errorR, min_median_errorG, min_median_errorB.

f. 2nd value is the median of the 2nd group as defined in step 8 for sub-block R prediction differences. The same applies for sub-block G and B, thus yielding max_median_errorR, max_median_errorG, max_median_errorB.

g. 3rd is Int1 composed by

i. Int1R = $(2 * \text{min_median_errorR} + \text{max_median_error}) / 3$,
 Int1G = $(2 * \text{min_median_errorG} + \text{max_median_errorG}) / 3$,
 Int1B = $(2 * \text{min_median_errorB} + \text{max_median_errorB}) / 3$

h. 4th is Int2 composed by

i. Int2R = $(\text{min_median_errorR} + 2 * \text{max_median_errorR}) / 3$,
 Int2G = $(\text{min_median_errorG} + 2 * \text{max_median_errorG}) / 3$,
 Int2B = $(\text{min_median_errorB} + 2 * \text{max_median_errorB}) / 3$

In figure 9 the groups and the two representative colors for each R, G, B sub-block are shown.

(In fact the relationships reported in the foregoing correspond to the presently preferred choice within the general relationships:

Int1 (R, G, B) =

$(a * \text{min_median_errorR} + b * \text{max_median_errorR}) / (a + b)$,

$(c * \text{min_median_errorG} + d * \text{max_median_errorG}) / (c + d)$,

$(e \cdot \text{min_median_errorB} + f \cdot \text{max_median_errorB}) / (e + f),$

Int2 (R, G, B) =

5

$(g \cdot \text{min_median_errorR} + h \cdot \text{max_median_errorR}) / (g + h),$

$(i \cdot \text{min_median_errorG} + l \cdot \text{max_median_errorG}) / (i + l),$

10

$(m \cdot \text{min_median_errorB} + n \cdot \text{max_median_errorB}) / (m + n)$

where a, b, c, d, e, f, g, h, i, l, m,
and n are weighing factors).

15

x) Define the look-up prediction error palette as
Look-up table =

[Min_median_errorR, Int1R, Int2R, Max_median_errorR]

[Min_median_errorG, Int1G, Int2G, Max_median_errorG]

[Min_median_errorB, Int1B, Int2B, Max_median_errorB]

20

xi) Associate the following 2 bits code with each
column of the above palette

Look-up table =

[Min_median_errorR, Int1R, Int2R, Max_median_errorR]

25

[Min_median_errorG, Int1G, Int2G, Max_median_errorG]

[Min_median_errorB, Int1B, Int2B, Max_median_errorB]

2 BITS CODE = 00 01 10 11

30

xii) For each $P_{ij} = R_{ij} \cup G_{ij} \cup B_{ij}$ (where i ranges
from 1 to Q=4 and j ranges from 1 to S=4) compute the
prediction error using predictors as defined in steps v
and vi.

p. Define the prediction error $E_{ij} = E_{Rij} \cup E_{Gij} \cup E_{Bij}$
 $E_{Bij} = (\text{PredictorR}_{k1} - R_{ij}) \cup (\text{PredictorG}_{k1} - G_{ij}) \cup (\text{PredictorB}_{k1} - B_{ij})$

- 5 xiii) For each E_{ij} compute the Euclidean distance between it and each look-up color as defined above in step ix. This is again the Euclidean distance between two points in a three-dimensional coordinate space and the difference is between homologous prediction error
 10 components.

Dist1= $\sqrt{(|E_{Rij} - \text{Min_median_errorR}|^2 + |E_{Gij} - \text{Min_median_errorG}|^2 + |E_{Bij} - \text{Min_median_errorB}|^2)}$
 Dist2= $\sqrt{(|E_{Rij} - \text{Int1R}|^2 + |E_{Gij} - \text{Int1G}|^2 + |E_{Bij} - \text{Int1B}|^2)}$
 15 Dist3= $\sqrt{(|E_{Rij} - \text{Int2R}|^2 + |E_{Gij} - \text{Int2G}|^2 + |E_{Bij} - \text{Int2B}|^2)}$
 Dist4= $\sqrt{(|E_{Rij} - \text{Max_median_errorR}|^2 + |E_{Gij} - \text{Max_median_errorG}|^2 + |E_{Bij} - \text{Max_median_errorB}|^2)}$

- 20 xiv) For each $E_{ij} = E_{Rij} \cup E_{Gij} \cup E_{Bij}$ find the minimum distance among Dist1, Dist2, Dist3 and Dist4. For example, this may be Dist1, and the two-bit code associated thereto is 00.

- 25 xv) Each Q*S block is fully coded in 8 different sessions, where in each session uses one of the 8 configurations for the predictions shown in figures 7a to 7h:

- 30 a. decode as per steps from xvi) below onward each of these 8 coded blocks
 b. for each decoded block and for each color component R, G or B compute the sum of squared differences between decoded colors and source ones (the one before their encoding)
 c. add the 3 numbers computed during step
 35 xv.b and find the minimum between the 8 options

xvi) Compose a bitstream as follows:

q. P22 color = 16 bits

r. P22+Min_median_error = 16 bits

5 (= P22R+Min_median_error U
P22G+Min_median_errorG U P22B+Min_median_errorB)

s. P22+Max_median_error = 16 bits (= P22R+Max_median_error U P22G+ Max_median_errorG U
P22B+ Max_median_errorB)

10 t. For each P_{11} , P_{12} , P_{13} , P_{14} , P_{21} , P_{23} , P_{24} ,
 P_{31} , P_{32} , P_{33} , P_{34} , P_{41} , P_{42} , P_{43} , P_{44} a 2 bits code is
associated following steps iv), v.j) or v.k), vi),
xii), xiii), xiv).

15 u. One of the 8 options (encoded with 3 bits)
as per step xv.c will be coded in this way

i. 2 more bits are added to the
bitstream

20 ii. 1 virtual bit is coded putting
P22+Min_median_error before or after
P22+Max_median_error inside the bitstream

xvii) For each block send the bitstream as defined
in step xvi) to a decoder process.

25 xviii) Each $Q \times S = 4 \times 4$ block in encoded to
16+16+16+(15*2)+2=80 bits = 16*5 = 10 bytes instead of
256 bits allows a compression factor of 3.2 if the RGB
source format is 565. It is 4.8 if the RGB source
format is 888.

30 In the decoding process, the decoder receives the
incoming bitstream and performs the following steps:

v. getP22

w. get P22+Min_median_error after
P22+Max_median_error or P22+Min_median_error

before $P22 + \text{Max_median_error}$: in this way the virtual bits as per step xvi.u.ii) are retrieved)

5 x. get 2 more bits that with the virtual bits will build the 3 bits as per step 16.u to select how to make the prediction by resorting to one of the patterns addressed by these three bits as shown in figure 7a to 7h

y. Then compute Min_median_error (step xix.w-P22) and Max_median_error (step xix.w-P22)

10 z. Next compute look-up prediction error palette as per step 9

aa. Use 2 bit code to address look-up table and adding the value stored at this address to P22 as defined in step 4 to recreate each P_{ij}

15 bb. Use colors decoded at step xix.aa as predictors (like defined in step v)

cc. Use 2 bit code to address the look-up table and adding the value stored at this address to predictors defined in xix.bb) to recreate each remaining color

20 The arrangement just described has been implemented the same set of pictures defined previously.

25 The results show that the instant predictive arrangement is able to achieve at least the same performance levels of S3TC and yields a compression factor slightly lower than S3TC on 565 sequences.

30 The proposed arrangement however achieves unquestionably better quality in the both the 3x3 and 4x4 versions, in spite of a lower compression ratio (i.e. in 4x4 reaches 80% of performance of S3TC). Even when worse quality has been measured, visual assessments showed imperceptible artifacts.

35 Of course, without prejudice to the underlying principle of the invention, the details and embodiments

may vary, also significantly, with respect to what has been described and shown by way of example only, without departing from the scope of the invention as defined by the annexed claims.

06. Feb. 2003

CLAIMS

1. A method for texture compressing images having a plurality of color components (R, G, B), the method including the step of decomposing the images in sub-blocks each including only one said color component (R, G, B), characterized in that it includes the steps of:
- defining at least one first predictor (R22, G22, B22) for each said sub-block,
 - computing for each said sub-block a respective set of prediction differences between at least some of the pixels of the sub-block and said predictor (R22, G22, B22),
 - sorting the prediction differences for each sub block,
 - generating a look-up prediction differences palette and defining therefrom a look-up prediction error palette, and
 - associating a code with each column of said error palette.
2. The method of claim 1, characterized in that said code associated with each column of said error palette is a two-bit code (00, 01, 10, 11).
3. The method of either of claims 1 or 2, characterized in that it includes the steps of:
- computing for each pixel (Pij) in said images a respective prediction error (Eij) using as a predictor a given pixel (P22) of said images, said given pixel (P22) being the union of the first predictors for said sub-blocks (R, G, B),
 - for each said prediction error (Eij), computing the Euclidean distance (Distj) between said prediction error and each each look-up color in said look-up prediction palette, the difference being between homologous prediction error components,

- for each respective prediction error (E_{ij}) find the minimum of said distance, and

- composing a bitstream as follows:

- a. P22 color = 16 bits
- 5 b. P22+Min_error = 16 bits
- c. P22+Max_error = 16 bits

where P22 is said given pixel used as a predictor and Min_error and Max_error are the minimum and maximum prediction errors per each R,G,B component in the block under coding.

4. The method of claim 1, characterized in that it includes the step of defining a said first predictor (R22, G22, B22) for each said sub-block (R, G, B) as
15 prediction for the respective sub-block excluding the predictor (R22, G22, B22) itself.

5. The method of either of claim 1 or claim 4, characterized in that it includes the step of computing for each said sub-block a respective set of prediction
20 differences comprised of the differences of said predictor to all the other pixels in the respective sub-block (R, G, B).

6. The method of any of claims 1, 4, or 5, characterized in that it includes the step of sorting
25 said prediction differences in ascending order in each said sub-block (R, G, B).

7. The method of claim 1, characterized in that it includes the step of generating a said look-up prediction differences palette wherein:

- 30 - a first value is the minimum of the prediction differences of each said sub-block (R, G, B), notated min_errorR, min_errorG, and min_errorB, respectively
- a second value is the maximum of the
35 prediction differences of each said sub-block

(R, G, B), notated max_errorR, max_errorG, and max_errorB, respectively

- a third value, notated Int1, is composed by

5 $(a * \text{min_errorR} + b * \text{max_errorR}) / (a + b),$
 $(c * \text{min_errorG} + d * \text{max_errorG}) / (c + d),$
 $(e * \text{min_errorB} + f * \text{max_errorB}) / (e + f),$

10 - a fourth value, notated Int2, is composed
 by

$(g * \text{min_errorR} + h * \text{max_errorR}) / (g + h),$
 $(i * \text{min_errorG} + l * \text{max_errorG}) / (i + l),$
 $(m * \text{min_errorB} + n * \text{max_errorB}) / (m + n)$

15 where a, b, c, d, e, f, g, h, i, l, m,
 and n are weighing factors.

8. The method of claim 7, characterized in that it
 includes the step of generating said look-up prediction
 20 error palette as

 [Min_errorR, Int1R, Int2R, Max_errorR]
 [Min_errorG, Int1G, Int2G, Max_errorG]
 [Min_errorB, Int1B, Int2B, Max_errorB]
 25

9. The method of claim 3 and claim 8,
 characterized in that it includes the step of
 associating the following two-bit codes with each
 column of said look-up prediction error palette:

30 [Min_errorR, Int1R, Int2R, Max_errorR]
 [Min_errorG, Int1G, Int2G, Max_errorG]
 [Min_errorB, Int1B, Int2B, Max_errorB]
 2 BIT CODE = 00 01 10 11

35

10. The method of any of claims 7 to 9, characterized in that it includes the step of computing said Euclidean distance as:

$$\begin{aligned} \text{Dist1} &= \sqrt{(|E_{Rij} - \text{Min_errorR}|^2 + |E_{Gij} - \text{Min_errorG}|^2 + \\ 5 \quad &|E_{Bij} - \text{Min_errorB}|^2)} \\ \text{Dist2} &= \sqrt{(|E_{Rij} - \text{Int1R}|^2 + |E_{Gij} - \text{Int1G}|^2 + |E_{Bij} - \text{Int1B}|^2)} \\ \text{Dist3} &= \sqrt{(|E_{Rij} - \text{Int2R}|^2 + |E_{Gij} - \text{Int2G}|^2 + |E_{Bij} - \text{Int2B}|^2)} \\ \text{Dist4} &= \sqrt{(|E_{Rij} - \text{Max_errorR}|^2 + |E_{Gij} - \text{Max_errorG}|^2 + \\ 10 \quad &|E_{Bij} - \text{Max_errorB}|^2)} \end{aligned}$$

11. The method of claim 1, characterized in that it includes the step of defining said first predictor (R22, G22, B22) for each sub-block as a prediction for a set of colors surrounding said predictor (R22, G22, B22).

12. The method of claim 11, characterized in that it includes the steps of:

- defining two groups of said sorted prediction differences, said groups being composed of the lowest elements and the highest elements in the sorting,
- 20 - generating a said look-up prediction differences palette wherein:
 - a first value is the median of said first group of prediction differences for each said sub-block, notated min_median_errorR, min_median_errorG, and min_median_errorB, respectively,
 - 25 - a second value is the median of said second group of prediction differences for each sub-block, notated max_median_errorR, max_median_errorG, max_median_errorB, respectively,
 - 30 - a third value, notated Int1, is composed by

$$\begin{aligned} &(a * \text{min_median_errorR} + b * \text{max_median_errorR}) / (a + b), \\ &(c * \text{min_median_errorG} + d * \text{max_median_errorG}) / (c + d), \\ &(e * \text{min_median_errorB} + f * \text{max_median_errorB}) / (e + f), \end{aligned}$$
 - a fourth value, notated Int2, is composed by
 35
$$(g * \text{min_median_errorR} + h * \text{max_median_errorR}) / (g + h),$$

$$(i * \text{min_median_errorG} + l * \text{max_median_errorG}) / (i + l),$$

$$(m * \text{min_median_errorB} + n * \text{max_median_errorB}) / (m + n)$$

where a, b, c, d, e, f, g, h, i, l, m, and n are weighing factors.

5 13. The method of claim 12, characterized in that it includes the step of generating said look-up prediction error palette as

10 [Min_median_errorR, Int1R, Int2R, Max_median_errorR]
 [Min_median_errorG, Int1G, Int2G, Max_median_errorG]
 [Min_median_errorB, Int1B, Int2B, Max_median_errorB]

15 14. The method of claim 13, characterized in that it includes the step of associating with each column of said error palette the following bit codes:

20 [Min_median_errorR, Int1R, Int2R, Max_median_errorR]
 [Min_median_errorG, Int1G, Int2G, Max_median_errorG]
 [Min_median_errorB, Int1B, Int2B, Max_median_errorB]

2 BIT CODE = 00 01 10 11

15. The method of claim 1, characterized in that it includes the steps of:

25 - defining a second set of predictors (R23, R22, R32, R33; G22, G23, G32, G33; B22, B23, B32, B33) and a plurality of respective scanning patterns in each sub-block (R, G, B) to generate prediction error among said predictors and the pixel of the block,

30 - computing said respective prediction error (Eij), thus generating a plurality of sets of prediction differences for said sub-blocks, whereby a corresponding plurality of coding options are available corresponding to said sets, said plurality being

determined by said sets and the number of said sub-blocks,

- coding said image by means of said plurality of coding options,

5 - computing, for each image block and each color component (R, G, B), a difference value with respect to the source colors for all colors inside the block before encoding, and

10 - find the minimum for said value over said plurality of coding options.

16. The method of claim 15, characterized in that said difference value is computed as a sum of squared differences.

15 17. The method of either of claims 15 or 16, characterized in that it includes the steps of:

- composing a bitstream as follows:

- q. P22 color = 16 bits

- r. P22+Min_median_error = 16 bits

- s. P22+Max_median_error = 16 bits

20 where P22 is said given pixel used as a predictor and Min_median_error and Max_median_error are the minimum and maximum prediction errors per each R,G,B component inside the block under coding,

25 - associating said code to each pixel (P₁₁, P₁₂, P₁₃, P₁₄, P₂₁, P₂₃, P₂₄, P₃₁, P₃₂, P₃₃, P₃₄, P₄₁, P₄₂, P₄₃, P₄₄) in said image other than said given pixel (P22), whereby one of said plurality of options is coded,

- adding a group of additional bits to the bitstream,

30 - coding one virtual bit by putting P22+Min_median_error before or after P22+Max_median_error inside the bitstream,

- sending said bitstream to a decoder process to generate decoded colors, and

- computing said difference value before encoding for each image and for each color component (R, G, B).

18. The method of any of the previous claims, characterized in that said color images are RGB color
5 images and said color components are the R, G, and B components of said RGB images.

19. A method for decoding a bitstream encoded with the process of claim 3, characterized in that it includes the steps of:

10 - deriving P22, P22+Min_error, and P22+Max_error from said bitstream, and obtain therefor Min_error and Max_error,

- computing said look-up prediction error palette using said bit code to address said look-up table, and

15 - adding the value thus retrieved to P22 to recreate each pixel in said images (P_{ij}).

20. A method for decoding a bitstream encoded with the process of claim 17, characterized in that it includes the steps of:

20 - deriving P22, P22+Min_median_error, and P22+Max_median_error from said bitstream, and obtain therefrom Min_median_error and Max_median_error,

- computing said look-up prediction error palette by:

25 - using said code to address said look-up table and adding the value stored at this address to P22 to recreate each pixel (P_{ij}),

- using the colors thus decoded as predictors,

30 - using said code to address said look-up table and adding the value stored at this address to said predictors to recreate each remaining color.

21. A processor configured for carrying out the method of any of claims 1 to 20 in the form of a
35 dedicated processor.

22. A processor configured for carrying out the method of any of claims 1 to 20 in the form of a suitably programmed general-purpose processor.

23. A computer program product directly loadable
5 into the memory of a digital computer and including software code portions performing the method of any of claims 1 to 20 when the product is run on a computer.

ABSTRACT

EPO-Munich
51

06. Feb. 2003

5 A method for texture compressing images having a plurality of color components (R, G, B), includes the step of decomposing the images in sub-blocks each including only one color component. At least one first predictor is defined for each said sub-block and a respective set of prediction differences is computed for each sub-block. Then the prediction differences for
10 each sub block are sorted, and a look-up prediction differences palette is set up by defining therefrom a look-up prediction error palette. A code is associated with each column of the error palette.

(Figure 5)

15

1/4

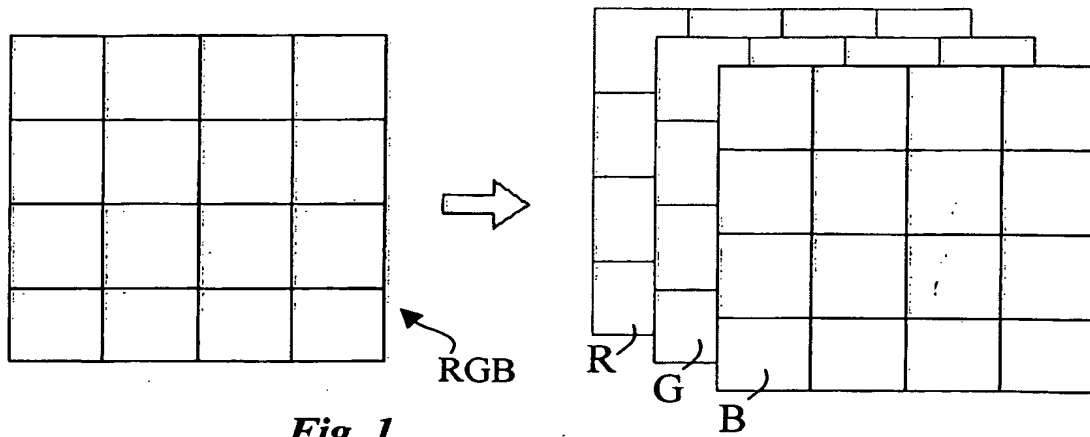


Fig. 1

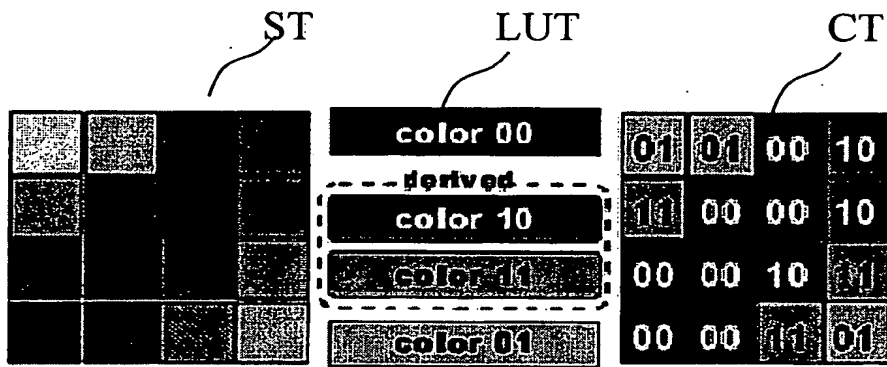


Fig. 2




Fig. 5




Fig. 8




Fig. 9

2/4

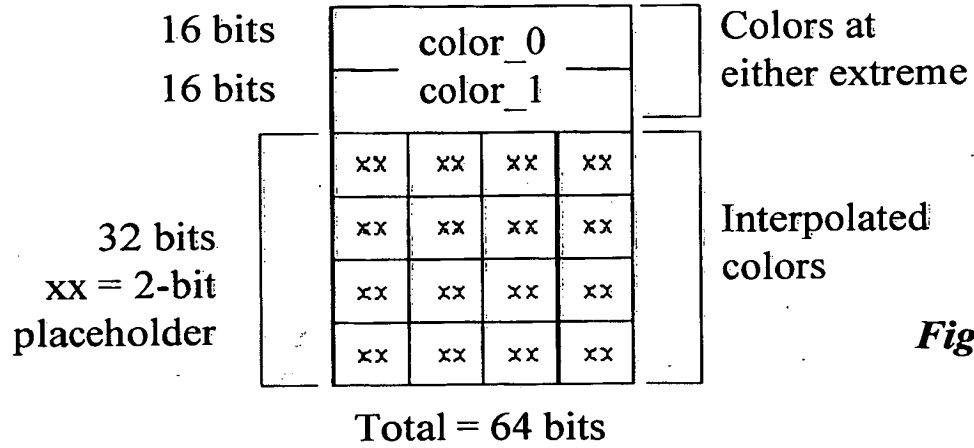


Fig. 3

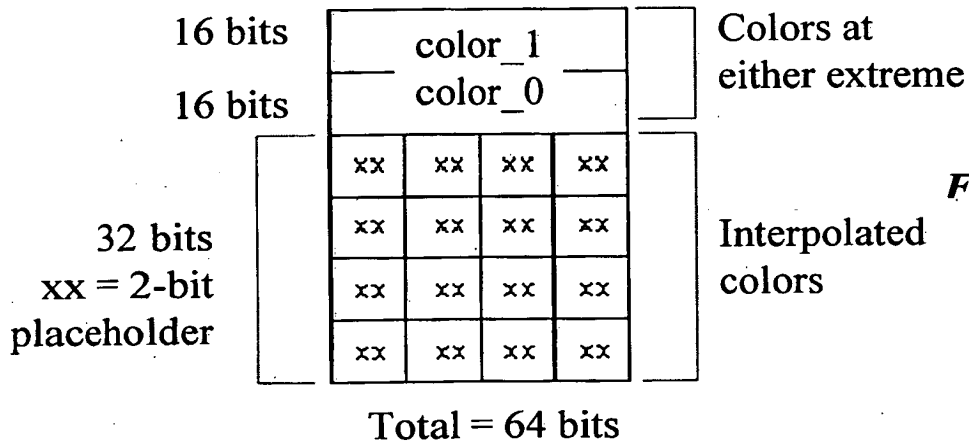


Fig. 4

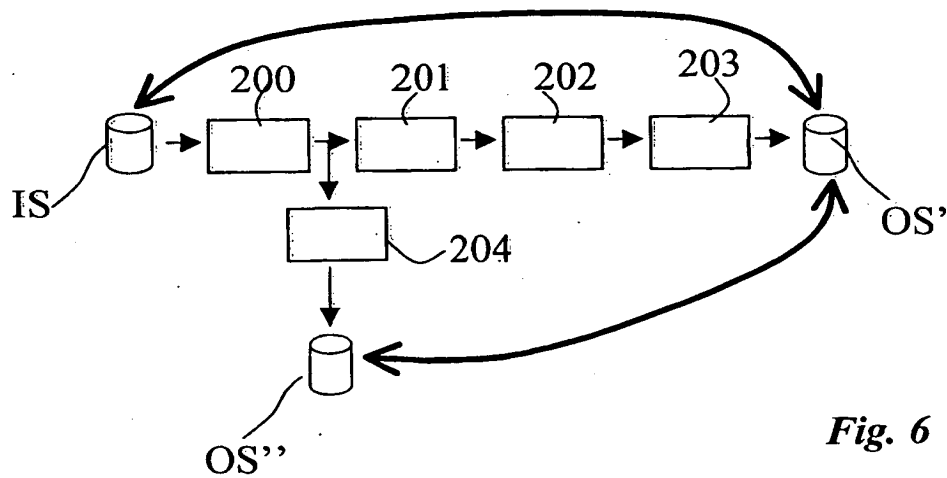


Fig. 6

Fig. 7a

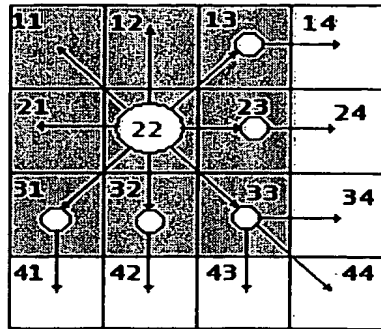


Fig. 7b

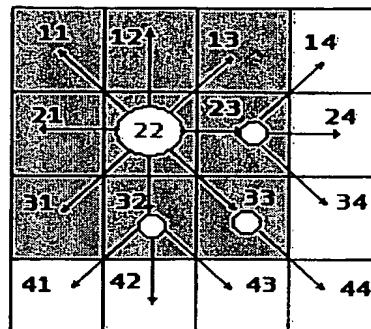


Fig. 7c

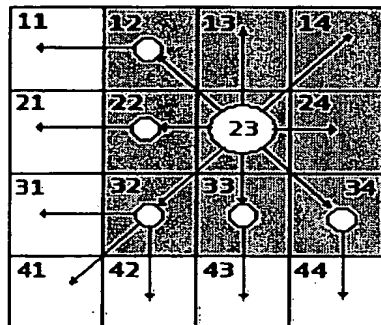


Fig. 7d

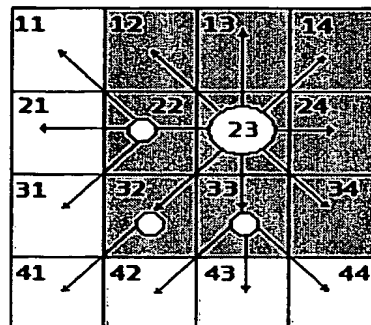


Fig. 7e

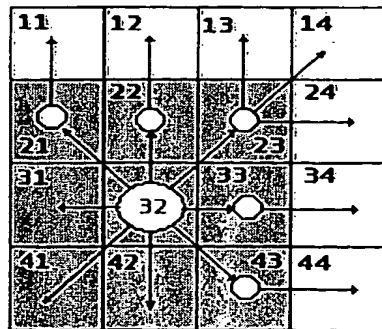


Fig. 7f

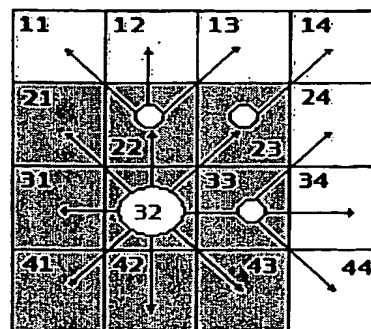
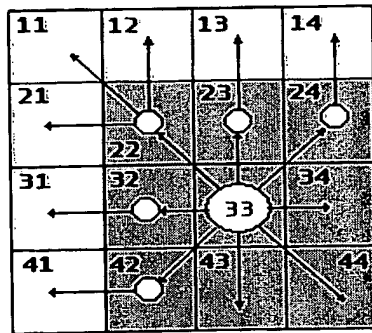


Fig. 7g*Fig. 7h*